## SMART SEAL LINER

SAFR / SADT / SBFR

SAFR rings begin 5 inches from the center of the distal end. SBFR rings begin 3 inches from the center of the distal end. SADT rings for:

- Sizes 20-28 begin 3 inches from the center of the distal end.
- Sizes 32-38 begin 5 inches from the center of the distal end.



## **DESCRIPTION**

The ALPS™ Smart Seal Liner features raised bands that grip the socket wall to form a secure interface. The low modulus bands stretch against the socket wall, while the smooth inner wall conforms easily to the residual limb. The Smart Seal Liner has a new seamless knitted construction with a modern look and is available in locking and cushion suspension. The locking version features a new distal construction to control distal distraction.









## TOP FEATURES



Seamless knitted fabric



Innovative single piece construction



Offered with or without distal attachment









## CROSS SECTION DIAGRAM


SADT 3.0 & 6.0MM UNIFORM

SAFR 3.0 & 6.0MM

SBFR 3.0 & 6.0MM



<sup>\*</sup> SAFR sizes 26, 28, 32, and 35 have a distal thickness of 4mm, while size 38 has a distal thickness of 7mm.

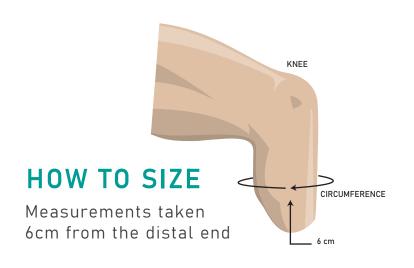

MEASURED SIZE (CM)	SAFR - CUSHION 3.0MM or 6MM	SADT - LOCKING 3.0MM or 6MM UNIFORM
20-23 cm		SADT <b>20</b> (3 or 6)
24-25 cm		SADT <b>24</b> (3 or 6)
26-27 cm	SAFR <b>26</b> (3 or 6)	SADT <b>26</b> (3 or 6)
28-31 cm	SAFR <b>28</b> (3 or 6)	SADT <b>28</b> (3 or 6)
32-34 cm	SAFR <b>32</b> (3 or 6)	SADT <b>32</b> (3 or 6)
35-37 cm	SAFR <b>35</b> (3 or 6)	
38-43 cm	SAFR <b>38</b> (3 or 6)	SADT <b>38</b> (3 or 6)
MEASURED SIZE (CM)	SBFR - CUSHION 3.0MM or 6MM	
20-23 cm	SBFR <b>20</b> (3 or 6)	-
24-25 cm	SBFR <b>24</b> (3 or 6)	
26-27 cm	SBFR <b>26</b> (3 or 6)	
28-31 cm	SBFR <b>28</b> (3 or 6)	





T: 727.528.8566 | 800.574.5426 | F: 727.528.8862 www.easyliner.com | info@easyliner.com 2895 42nd Avenue North St. Petersburg, Florida 33714

